

Model 5AG-S by




HIGH CAPACITY



Model 5AG-S
GREATER
DOOR CLEARANCE...
WASHES TALLER WARES

Double Duty Model designed to multiply your dishwashing capability. Features 20 1/2" door opening, air-gap fill, dual screening. Washes 74 racks per hour with two powerful 1 1/2 HP Pumps.

Wash Sheet Pans Horizontally with the optional Pan Rack

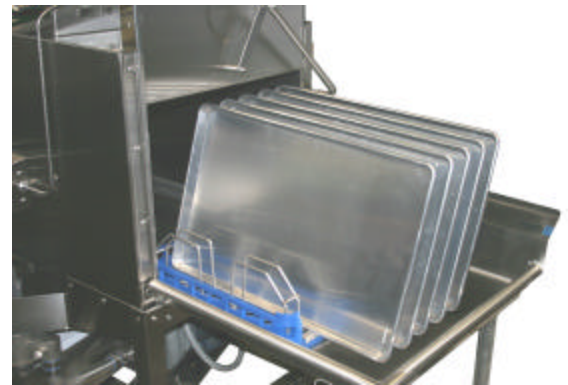

At American Dish Service, Quality People, Designs, and Products have been the foundations of our organization for over **45 years**.

www.americandish.com

900 Blake Street Edwardsville, KS 66111-3820



American Dish Service

Manufacturers of Ware Washing Equipment

Toll Free

(800) 922-2178

Phone

(913) 422-3700


Fax

(913) 422-6630


Model 5AG-S

TAKES CARE OF BIG JOBS IN NO TIME FLAT

- Cleans 74 racks per hour
- Water consumption is 1.6 gallons per rack
- Great Door Clearance at 20 1/2"
- Top Mount Controls with Auto Start
- Stainless Steel air gap
- Quick release spray arms
- Two Quick service 1 1/2 HP pumps
- Door safety switch - external prime switches
- Delime Switch located in the control panel

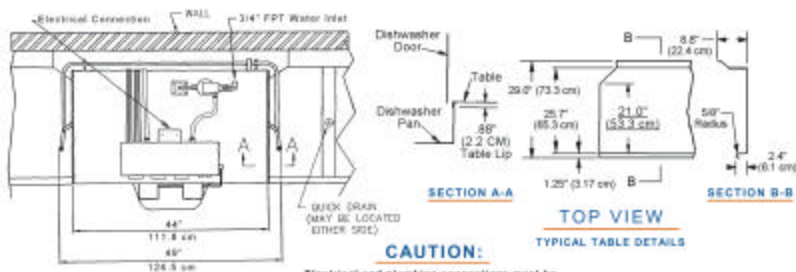

CAUTION:
Electrical and plumbing connections must be made by a qualified Service Person who will assure that the installation is in compliance with all available Federal, State, and Local Health, Electrical, Plumbing, and Safety Codes.

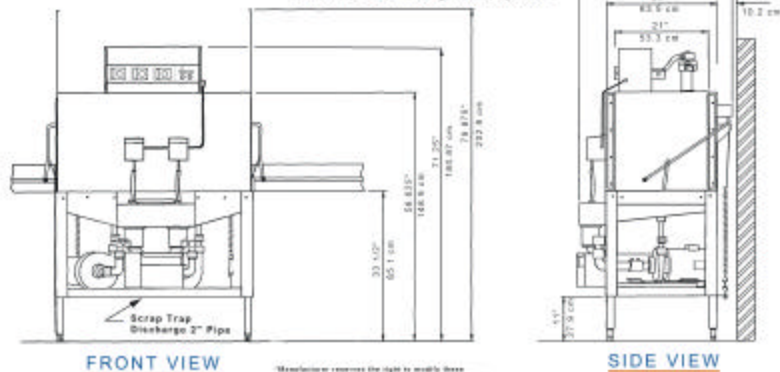

*Manufacturer reserves the right to modify these specifications in compliance with regulatory agencies and manufacturing expediency.

Model 5AG-S

FAMILY MODELS

	5AGS	5S	5AHS
RATED CAPACITY (racks/hour)	74	56	46
WASH TIME (in seconds)	45	60	75
RINSE TIME (in seconds)	30	45	60
DWELL (in seconds)	15	15	15
TOTAL CYCLE TIME (in seconds)	90	120	150

WATER TEMPERATURE 120 Deg. F/49 Deg. C **MINIMUM**
WATER CONSUMPTION (NSF) 3.2 GALS. PER CYCLE (12.1 Liters)
MOTOR (2) 1.5 H.P. 1.125 KW
ELECTRICAL RATING (NEC) 115 VOLTS Single Phase

Connect to two Supply Sources Using 8-6 AWG Copper Wire. Circuit Protection: 20 AMP Circuit Breaker or Fuse with a 20 Amp Rating

OR
 Connect to Supply Sources Using 8-6 AWG Copper Wire suitable for at least 75 Deg. F.)
 Circuit Protection: 40 AMP Circuit Breaker or Fuse with a 40 AQPMP Rating

RACK SIZE (2) 19.75" Square (50.2cm Square)
DOOR CLEARANCE 20 1/2" x 21" (52cm x 53cm)
WATER INLET 3/4" FPT
DRAIN SIZE (Scrap Trap) 2" Pipe
HEIGHT (Doors Open) 79.875" (202.9cm)
HEIGHT (Doors Closed) 71.25" (180.9cm)
WIDTH (Overall) 49" (124.5cm)
WIDTH (Table to Table) 44" (111.8cm)
DEPTH (Overall) 34" (86.4cm)
SHIPPING WEIGHT 408 lbs. (185 kg)
SHIPPING VOLUME (Uncrated) 64.16 cu ft. (1.82 cu m)

Effective: 4/05

© 4/05

ADS has built a strong history based on Customer Service, Quality and Reliability. A Commitment to Excellence is the driving force behind American Dish Service.

900 Blake Street Edwardsville, KS 66111-3820 **Toll Free (800) 922-2178 Phone (913) 422-3700 Fax (913) 422-6630**